

Applications in Pharmaceutical Market and
Introduction to Gas Detectors and
Alarms for Safety and Security

Document contents

- **About Riken Keiki**
- **Why do we need gas detectors?**
Risks associated with toxic gases
- **Applications in pharmaceutical market**
- **Major examples of accidents**
- **Product information**
- **International agents**




About Riken Keiki

About Riken Keiki




RIKEN

Riken Keiki



**Headquarters
To be completed in September
2018 (conceptual drawing)**

Riken Keiki was originally established to commercialize and sell detectors for preventing explosions in coal mines and on oil tankers.

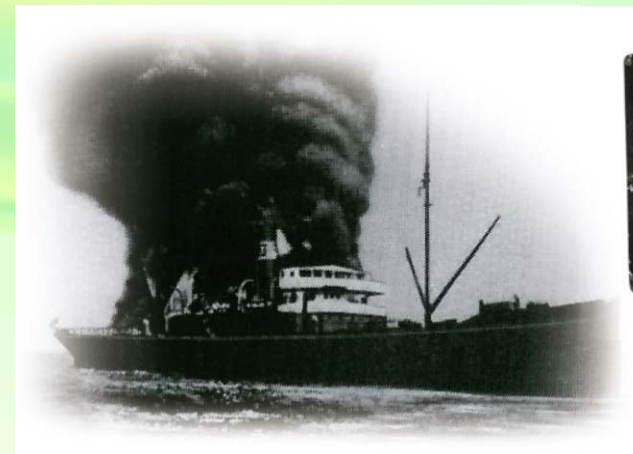

About Riken Keiki



**Optical Gas
Indicator Model
3 (1939)**

Certification

National heritage of
analytical and scientific
instruments
2014

**Methane gas measurements
in coal mine**

Company profile



Company name	Riken Keiki Co., Ltd.
Established	March 15, 1939
Location	Headquarters: 2-7-6 Azusawa Itabashi-Ku, Tokyo Development Center: 2-3 Minamisakae-cho, Kasukabe-shi, Saitama
Factories	Hakodate-shi, Hokkaido; Sakurai-shi, Nara (affiliated company)

Headquarters



**To be completed in September 2018
(conceptual drawing)**

Development Center



About Riken Keiki



Headquarters (Itabashi-Ku, Tokyo)




To be completed in September 2018
(conceptual drawing)

Development Center (Kasukabe-shi, Saitama)



Locations of sales offices ◆ Domestic ◆

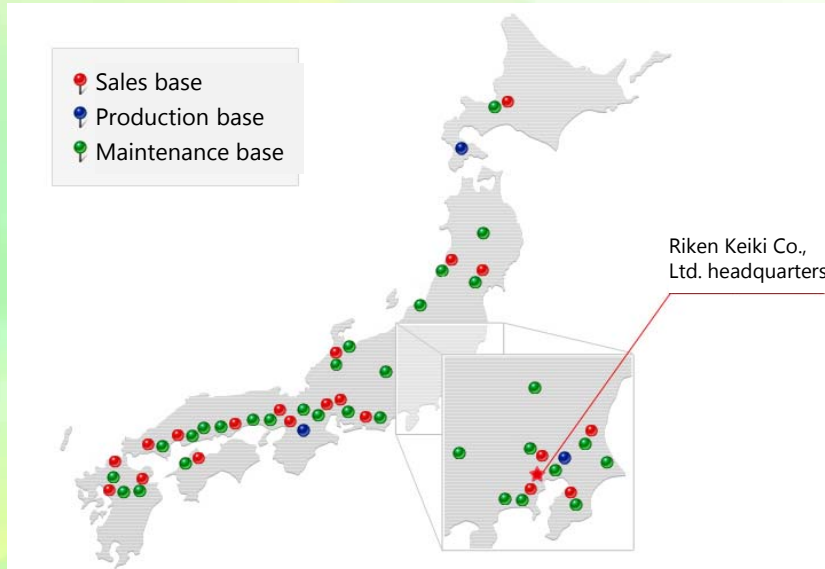

◆ Global ◆



Company profile



Various bases	Domestic sales and branch offices: 20 locations Service stations: 32 locations Global bases: 7 locations
Major sales items	Combustible gas detectors and alarms Gas detectors and alarms designed to prevent oxygen deficiency accidents Toxic gas detectors and alarms Combined gas detectors and alarms Various measuring instruments for environmental measurements and other instruments
Capital	2,565.5 million yen
Number of employees	965 (non-consolidated), 1,127 (consolidated) * As of September 30, 2017

Hakodate Factory
(Hakodate-shi, Hokkaido)



Nara Factory
(Sakurai-shi, Nara)



Company history



1939	Riken Keiki Co., Ltd. established to produce and sell optical gas detectors, photoelasticity apparatuses, and other precision instruments invented and developed by RIKEN
1959	Start production and sale of combustible gas alarms and detectors (catalytic combustion type).
1967	Start production and sale of oxygen measuring instruments (OX-1).
1970	Start production and sale of monitoring tape type measuring instruments (FP-200).
1972	Start production and sale of non-dispersive infrared measuring instruments (RI-550).
1975	Start production and sale of electrochemical type measuring instruments (EC-231).
1986	Start production and sale of photoemission yield spectrometers (AC-1).
2009	70th anniversary of founding
2014	Start production and sale of portable X-ray diffractometers equipped with XRF (DF-01).
2015	Start production and sale of portable multi gas detectors (GX-6000), first product of its kind in Japan capable of housing photoionization detectors (PID).

Why Do We Need Gas Detectors? Risks Associated with Toxic Gases

Need for gas detectors (combustible gases)

- **Criteria set by United Nations' Globally Harmonized System of Classification and Labelling of Chemicals (GHS)**

According to the United Nations' Globally Harmonized System of Classification and Labelling of Chemicals (GHS), a combustible gas (or flammable gas) is defined as follows:

A combustible or flammable gas is a gas having an explosive (flammable) range when mixed with air under atmospheric conditions of 20°C and standard pressure of 101.3 kPa.

Gases falling under this definition are further subdivided into the following two categories based on the severity of the associated risk:

Category 1 (Danger: Extremely flammable gas)

Gases capable of igniting at 20°C and standard pressure of 101.3 kPa when occurring in a mixture of 13% or less by volume with air or having an explosive (flammable) range of at least 12% when mixed with air regardless of the lower explosion (flammable) limit

Category 2 (Warning: Flammable gas)

Gases, other than those in Category 1, which are gaseous at 20°C and a standard pressure of 101.3 kPa and have an explosive (flammable) range when mixed with air



We need gas detectors because flammable gas leaks can lead to explosions.

Need for gas detectors (definition of permissible concentration)



● Definition of permissible concentration

Even when workers are exposed to hazardous substances at work sites, no adverse health effects should emerge as long as the airborne concentration of the **hazardous** substance remains below the permissible concentration.

Recommended permissible concentrations have been set by the American Conference of Governmental Industrial Hygienists (ACGIH) and the Japan Society for Occupational Health. We use the **ACGIH** permissible concentrations.

● Types of permissible concentrations

• TWA (Time Weighted Average)

Time Weighted Average refers to time-weighted average concentrations over an 8-hour workday and 40-hour workweek of routine work to which workers may be repeatedly exposed without adverse health effects.

• STEL (Short Term Exposure Limit)

Short Term Exposure Limit refers to exposure that does not lead to adverse health effects if each exposure does not exceed 15 minutes, the number of daily exposures does not exceed four, and the exposures are separated by at least one hour.

• C (Ceiling value)

Ceiling Value refers to the upper limit that can never be exceeded.



We need gas detectors because leaks exceeding permissible concentrations can lead to accidents.

How human body reacts to oxygen-deficiency


O2 Concentration
21%

Symptoms
Natural air



O2 Concentration
18%

Symptoms
Limit level for not causing serious health problems. Continuous ventilation is required

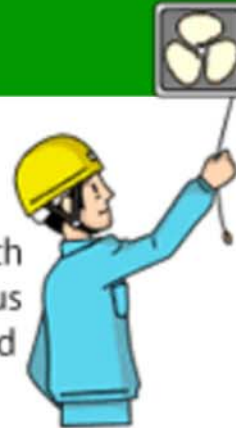

O2 Concentration
16% - 12%

Symptoms
Rapid breathing,
Increase in pulse rate,
Loss of concentration,
Headache, Nausea,
Ear ringing



O2 Concentration
14% - 9%

Symptoms
Stupor, Headache,
Nausea, Cyanosis,
Faintness on the entire
body



O2 Concentration
10% - 6%

Symptoms
Comatose, Loss of consciousness,
Muscle spasm on the entire body



O2 Concentration
6% or less

Symptoms
Unconsciousness, Comatose,
Cessation of breathing,
Cardiac arrest, Die in 6 minutes



Effects of hydrogen sulfide (H₂S) on human body



Concentration (ppm)	Effects and Toxicity
0.025	Smell vaguely. (It varies according to the individual.)
0.3	Smell clearly.
3 - 5	Smell moderate degree of objectionable odor.
10	Lower-level to irritate eyes' mucus membranes.
20 - 40	A strong odor. Lower-level to irritate lungs' mucous membranes.
100	Sense of smell is impaired in 2 - 15 minutes. Eyes and respiratory tract are irritated in 1 hour. 8 - 48 hours continuous exposure can lead to death.
170 - 300	1 hour exposure is the limit for not causing serious health problems.
400 - 700	Life-threatening exposure in 0.5 - 1 hour.
800 - 900	Bring on loss of consciousness, cessation of breathing and death.
1000	Bring on immediate loss of consciousness and death.

Effects of carbon monoxide (CO) on human body



Concentration (ppm)	Effects and Toxicity
100	No noticeable effects even after breathing for a few hours.
200	A mild headache in around 1.5 hours.
400 - 500	Headache, nausea and ear ringing in around 1 hour.
600 - 1000	Loss of consciousness in around 1 - 1.5 hours.
1500 - 2000	Headache, vertigo and disabling nausea in around 0.5 - 1 hour, and losing consciousness.
3000 - 6000	Headache, vertigo, disabling nausea...etc. in a few minutes. 10 - 30 minutes exposure can lead to death.
10000	Bring on immediate loss of consciousness and death.


Applications in Pharmaceutical Market

- 1. Overall flow of processes in pharmaceutical manufacturing plant**
 - 1-1: Preparing raw materials**
 - 1-2: Producing solid drug**


- 2. Details of each process**
 - 2-1: Weighing**
 - 2-2: Reaction of chemical substances and preparing raw materials**
 - 2-3: Purifying raw materials**
 - 2-4: Inspecting raw materials**
 - 2-5: Storage**
 - 2-6: Raw material granulation, mixing, and tableting**
 - 2-7: Product packaging**
 - 2-8: Other**

1. Overall flow of processes in pharmaceutical manufacturing plant


Solid drug

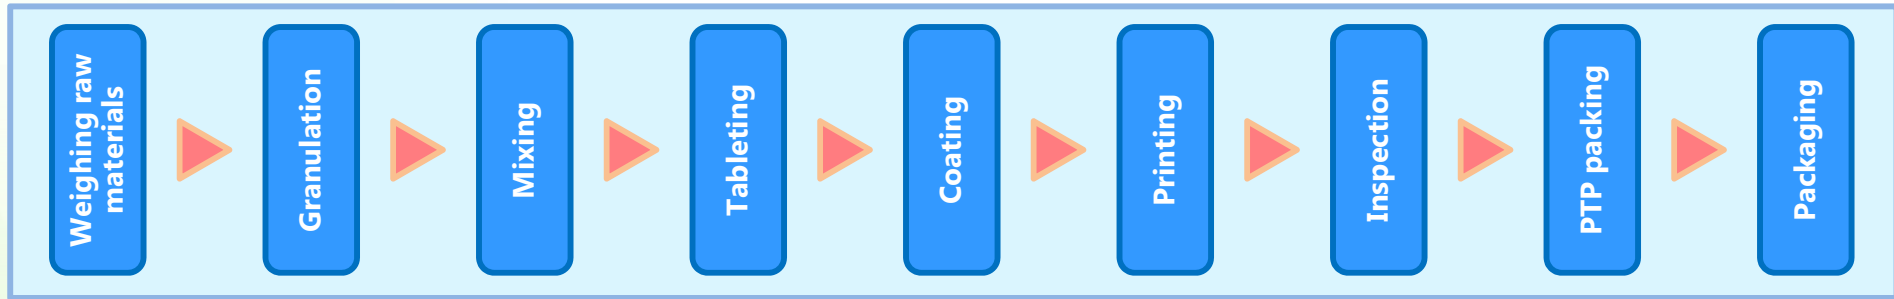


Injections

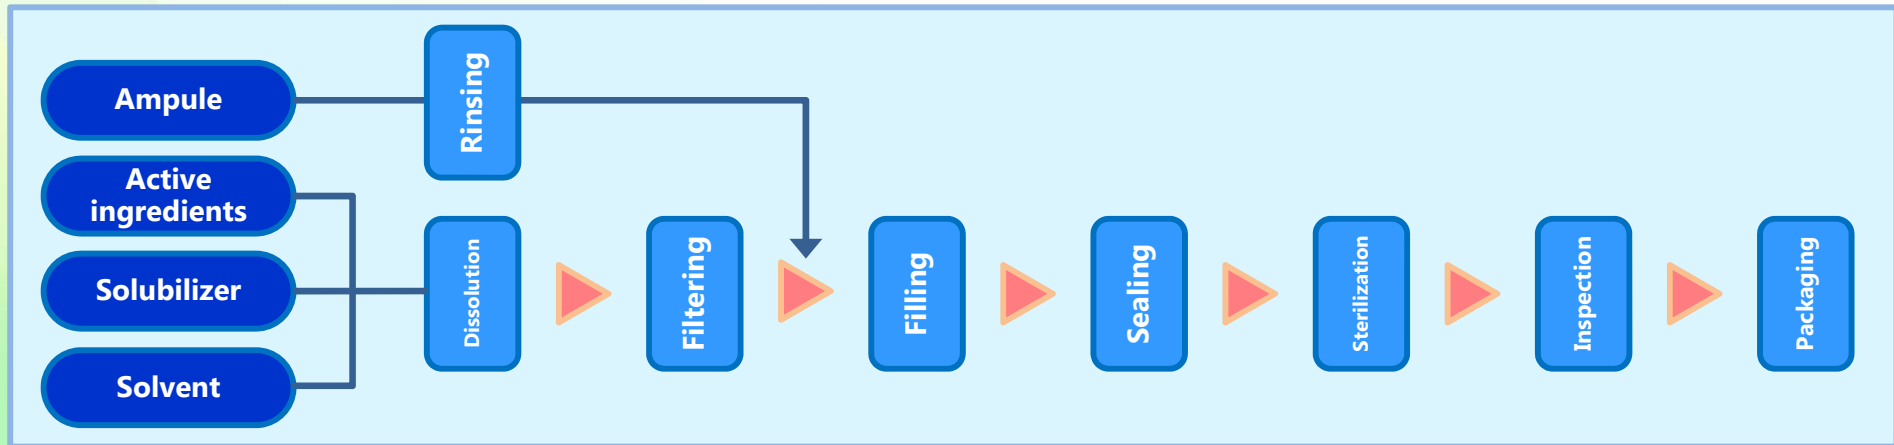

Drug substance

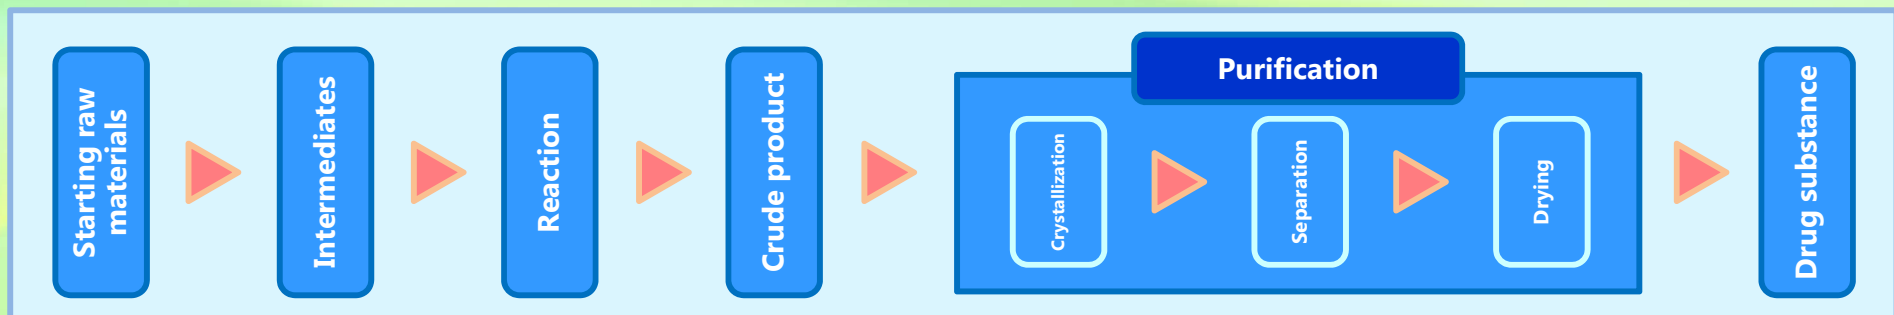


1-1: Preparing raw materials

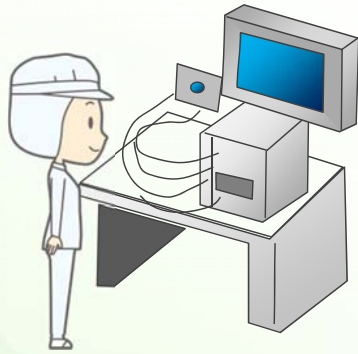


Weighing chemical substances

⇒ Go to 2-1.



Reaction of chemical substances
⇒ Preparing raw materials

⇒ Go to 2-2.

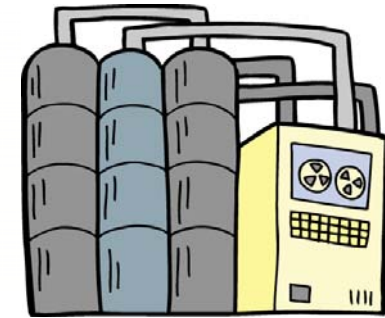


Purification (crystallization,
separation, drying)

⇒ Go to 2-3.




Inspecting raw materials

⇒ Go to 2-4.



Storing raw materials

⇒ Go to 2-5.



To production
of solid drug



1-2: Producing solid drug

From preparation of raw materials



Weighing raw materials

⇒ Go to 2-1.

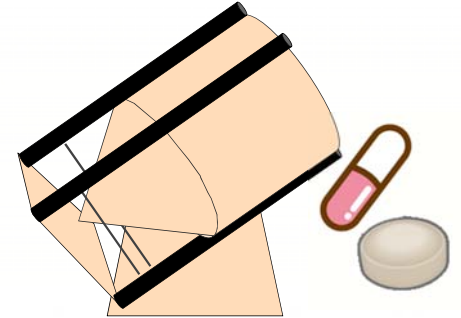


Raw material granulation, mixing, and tableting

⇒ Go to 2-6.





Product inspection



Product packaging

⇒ Go to 2-7.

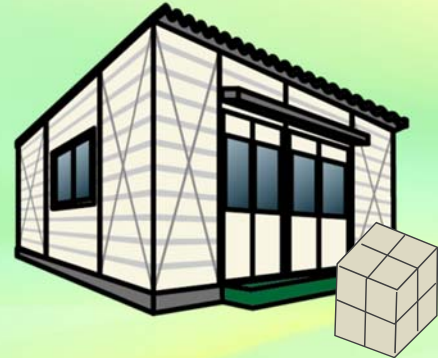

Product storage


⇒ Go to 2-5.

2-1: Weighing

Description: Volatile organic compounds (VOCs) are sometimes used when preparing raw materials or in the weighing process in producing the solid drug. Weighing is also performed with nitrogen substitution.

Hazardous risks: VOCs may lead to poisoning, while nitrogen leaks may cause oxygen deficiencies.

⇒ **Detecting VOCs to prevent poisoning**
Detecting oxygen concentration to prevent oxygen deficiencies

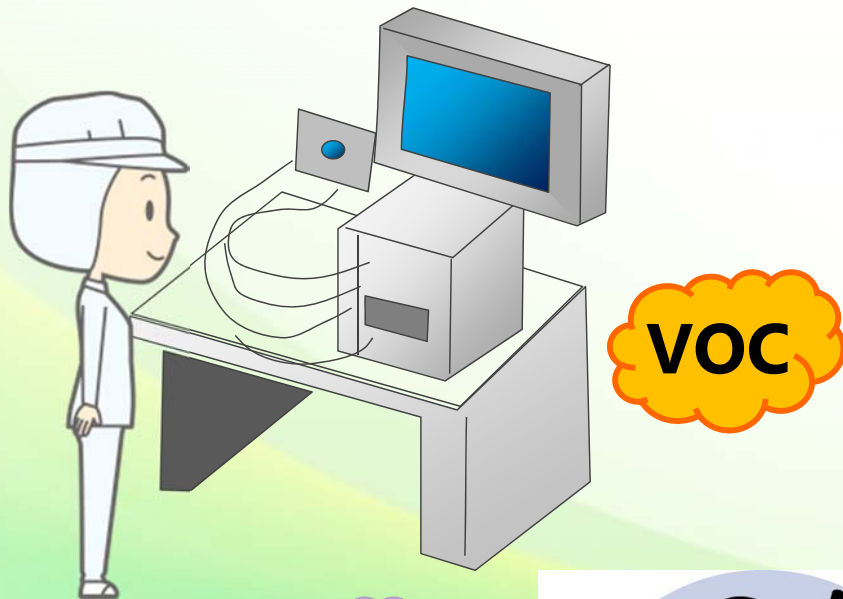


2-2: Reaction of chemical substances and preparing raw materials

Description: In reaction processes in which raw materials are placed in a reaction tank and mixed, the raw materials are heated and cooled to initiate the chemical reactions that create the required compounds.

Hazardous risks: The volatile organic compounds (VOCs) generated in the reactions may lead to poisoning.

⇒ Detecting VOCs to prevent poisoning

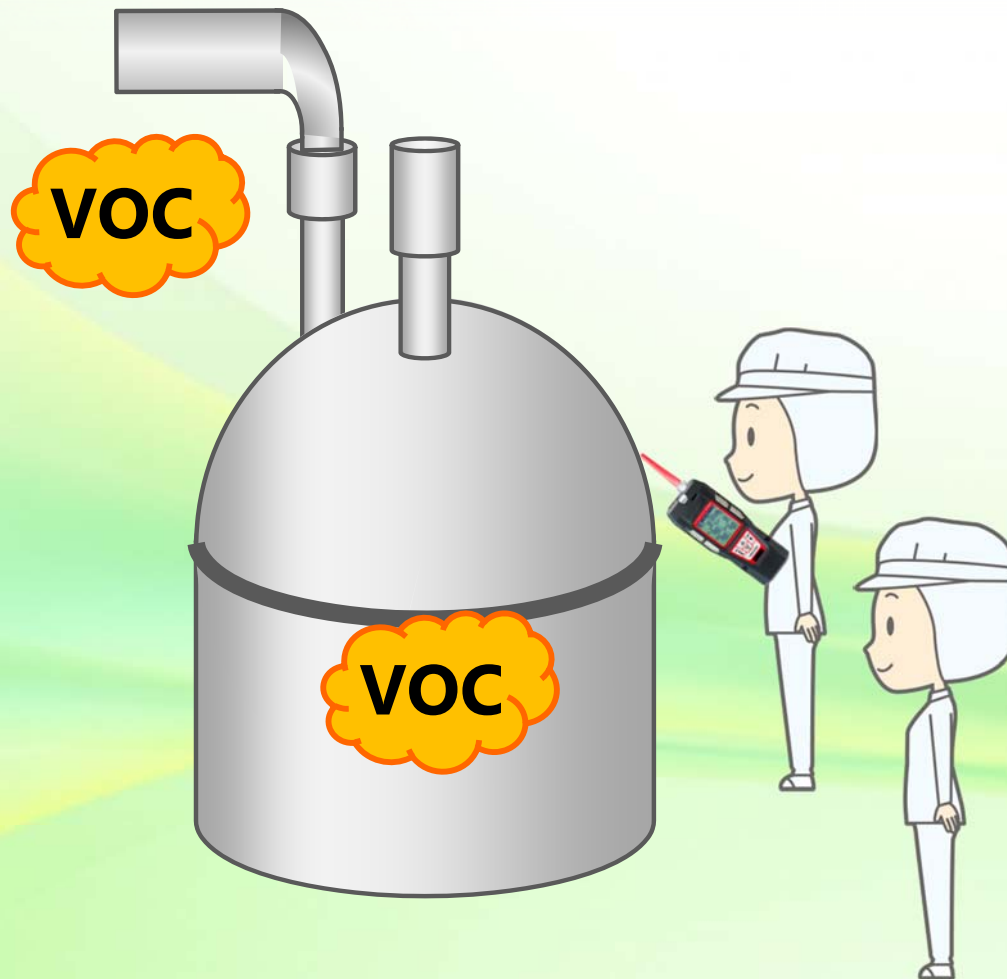

Fixed PID VOC Monitor
Model: RVOC



Personal Four Gas Monitor
Model: GX-6000

2-3: Purifying raw materials

Description: The purification processes involve crystallization, separation, and drying. In the crystallization process, the compound is cooled and crystallized. In the separation process, the crystallized solution containing crystals is separated in a centrifugal separator to remove excess liquid and extract crystals. The separated crystals are dried in a vacuum dryer.

Hazardous risks: Volatile organic compounds (VOCs) occurring in the crystallized solution may lead to poisoning.

⇒ Detecting VOCs to prevent poisoning



Fixed PID VOC
Monitor
Model: RVOC





Personal Four Gas
Monitor
Model: GX-6000

2-4: Inspecting raw materials

Description: The drug substance obtained is subjected to various analyses and tests to rigorously assess quality and safety.

Hazardous risks: The volatile organic compounds (VOCs) used in the analyses and tests can lead to poisoning. Leaks of gases used in the analyzer or processes under nitrogen substitution such as those in a glove box may cause oxygen deficiencies.

⇒ **Detecting VOCs to prevent poisoning**
Measuring oxygen concentrations to prevent oxygen deficiencies

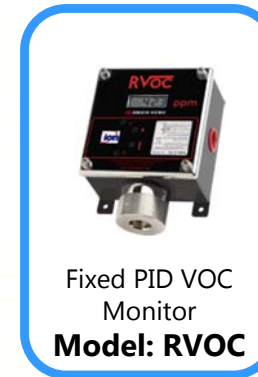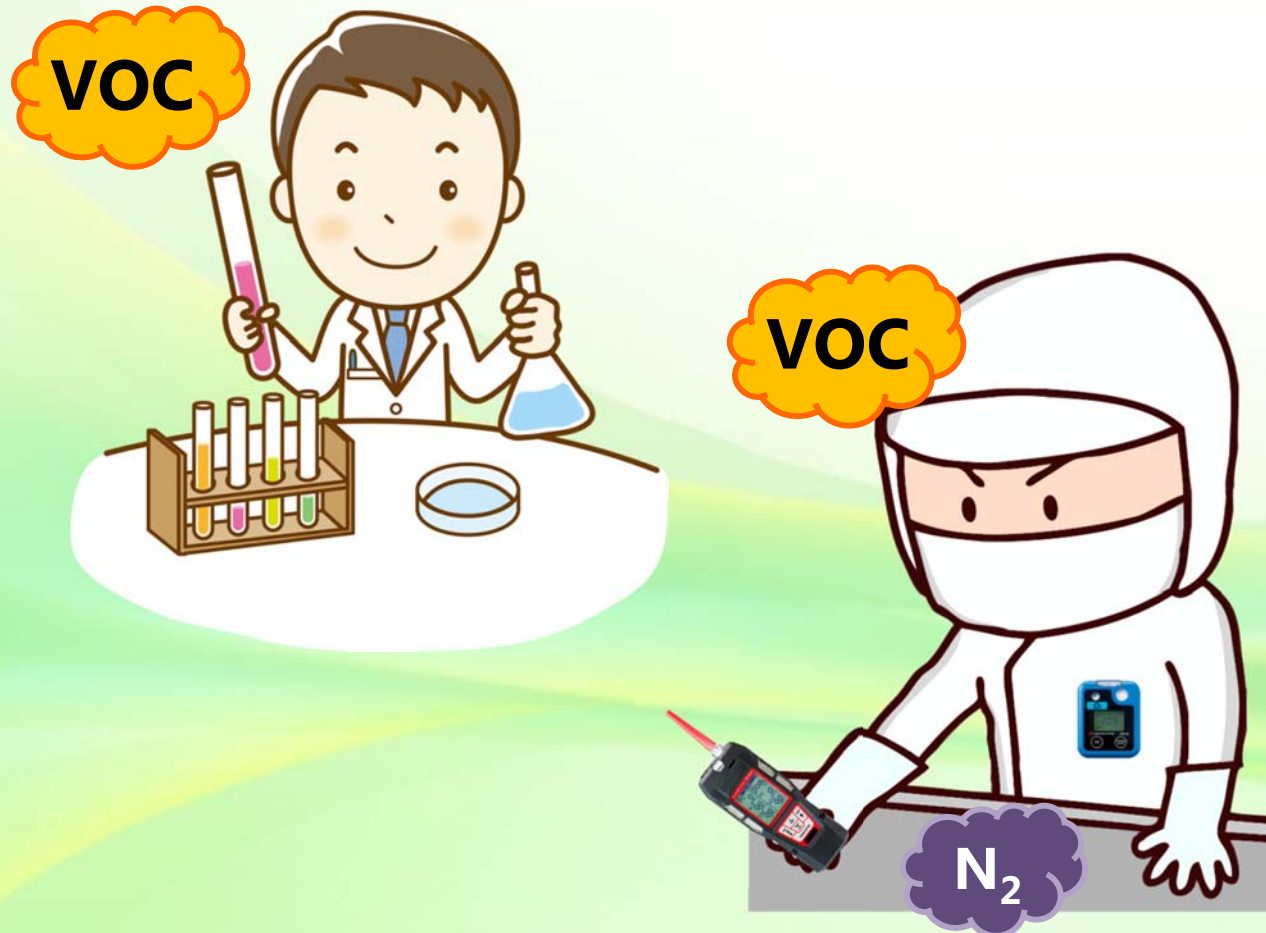

2-5: Storage

Description: The raw materials, completed ingredients, and final products are stored in suitable environments at temperatures from -80°C to room temperature.

Hazardous risks: Scattering of raw materials and ingredients (such as volatile organic compounds) due to inappropriate storage may lead to poisoning. Insufficient ventilation in the storage warehouse may cause oxygen deficiencies.

⇒ **Detecting VOCs to prevent poisoning**
Measuring oxygen concentrations to prevent oxygen deficiencies




2-6: Raw material granulation, mixing, and tableting

Description: The solid drug is produced through raw material granulation, mixing, and tableting.

Hazardous risks: The volatile organic compounds (VOCs) generated during the processes may cause explosions or poisoning.

⇒ Detecting VOCs to prevent poisoning and explosions

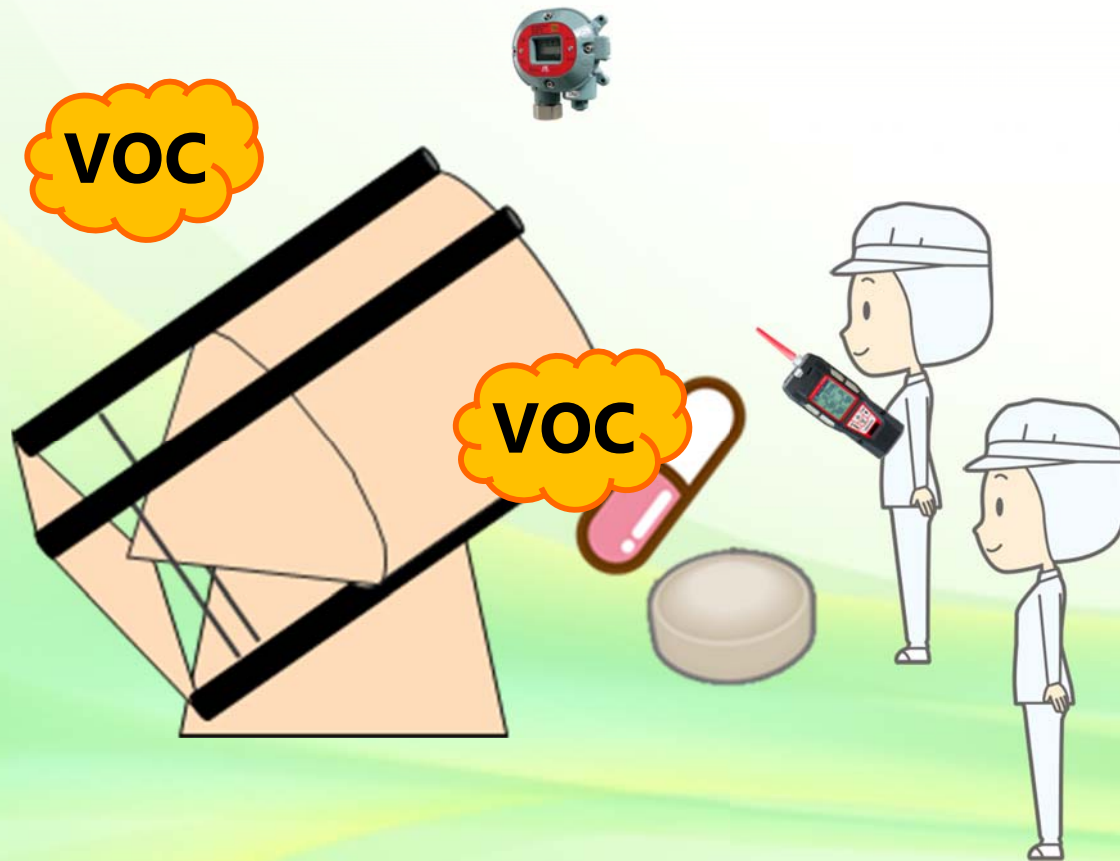

Fixed PID VOC Monitor
Model: RVOC



Smart Transmitter/
Gas Detector
Model: SD-1




Personal Four Gas Monitor
Model: GX-6000

2-7: Product packaging

Description: Some products that have passed inspection and are being packaged are nitrogen packed.

Hazardous risks: N₂ leaks during nitrogen packing may result in oxygen deficiencies ⇒ **Measuring oxygen concentrations to prevent oxygen deficiencies**

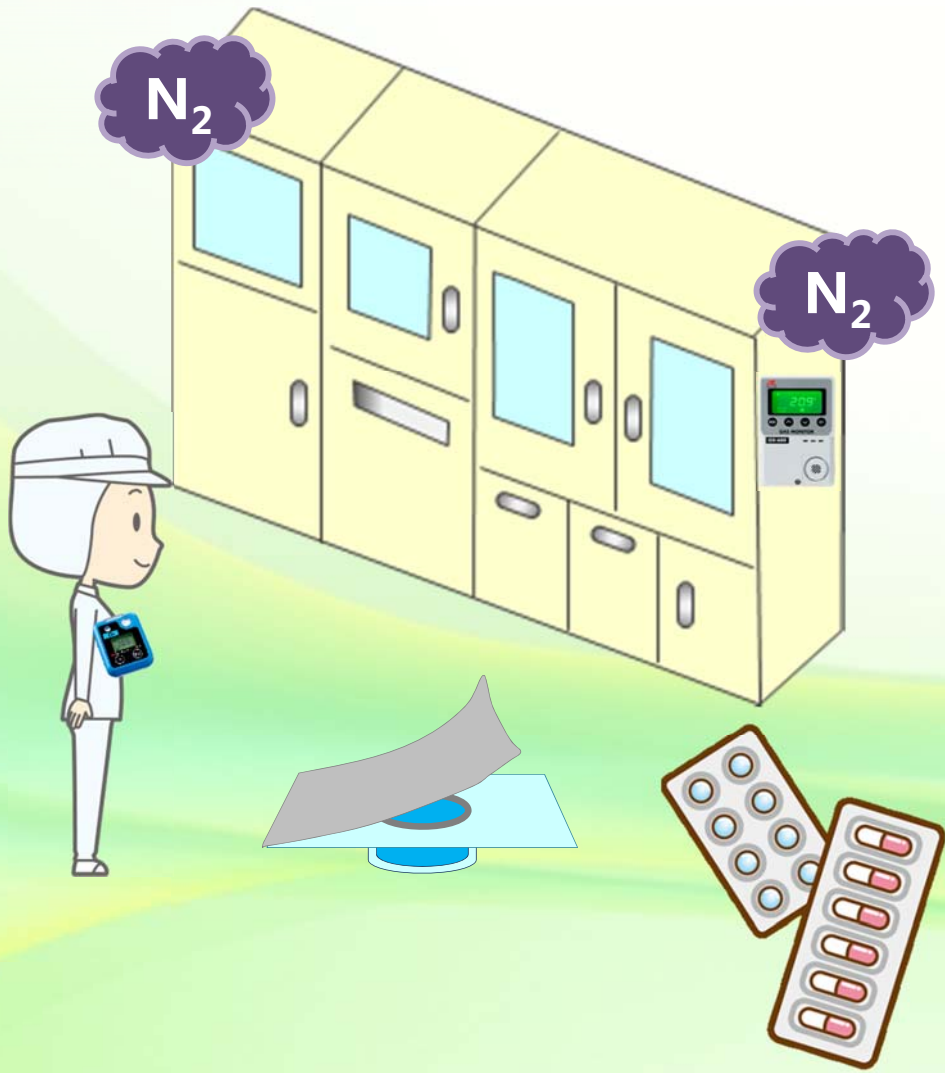

2-8: Other

- ① **Leaks of LPG and town gas used as the heat source of evaporators and dryers may cause explosions.**
- ② **Work involving N₂ substitution equipment or glove box or work in areas with insufficient ventilation may result in oxygen deficiencies.**
- ③ **Leaks of hydrogen, helium, liquid N₂, or other gases from gas chromatography equipment or other analyzers may result in oxygen deficiencies in work areas.**
- ④ **Volatile organic compounds (VOCs) generated in processes using organic solvents (containing VOCs) may cause explosions or poisoning.**

Major Examples of Accidents

Prepared by extracting and processing materials from the Safety at Work Site (Ministry of Health, Labour and Welfare: <http://anzeninfo.mhlw.go.jp/index.html>)

Workers were poisoned while rinsing crystals with acetonitrile in a centrifugal separator.

[Location of accident]

While rinsing crystals in a centrifugal separator in drug production

[Cause of accident]

The crystals produced in the reaction tank were transferred to a centrifugal separator, filtered, and rinsed with acetonitrile. When the rinsing proved insufficient, the decision was made to rub and rinse the crystals by hand in the centrifugal separator. The local ventilation duct of the centrifugal separator was removed because it interfered with the work, resulting in inhalation exposure to acetonitrile vapor among workers.

[Damage/injuries]

On the next day, four workers engaged in the rubbing and rinsing of crystals complained of ill health and weakness. They went to the hospital and were diagnosed with acetonitrile poisoning.



Wearing gas detectors on a routine basis enables early detection of used gas leaks and improves work safety.



Organic solvent poisoning during the process of drying pharmaceutical intermediates

[Location of accident]


At a pharmaceutical manufacturing plant during the process of drying pharmaceutical intermediates containing large amounts of acetone (solvent)

[Cause of accident]

In producing drugs and other products, workers were exposed to high concentration acetone while carrying intermediates to the drying room after filtering, transferring the intermediates to trays, and placing trays on the shelves of the low-temperature dryer.

[Damage/injuries]

After completing work in the drying room, two workers complained of physical discomfort. They were examined at the hospital, diagnosed with organic solvent poisoning, and hospitalized for treatment.

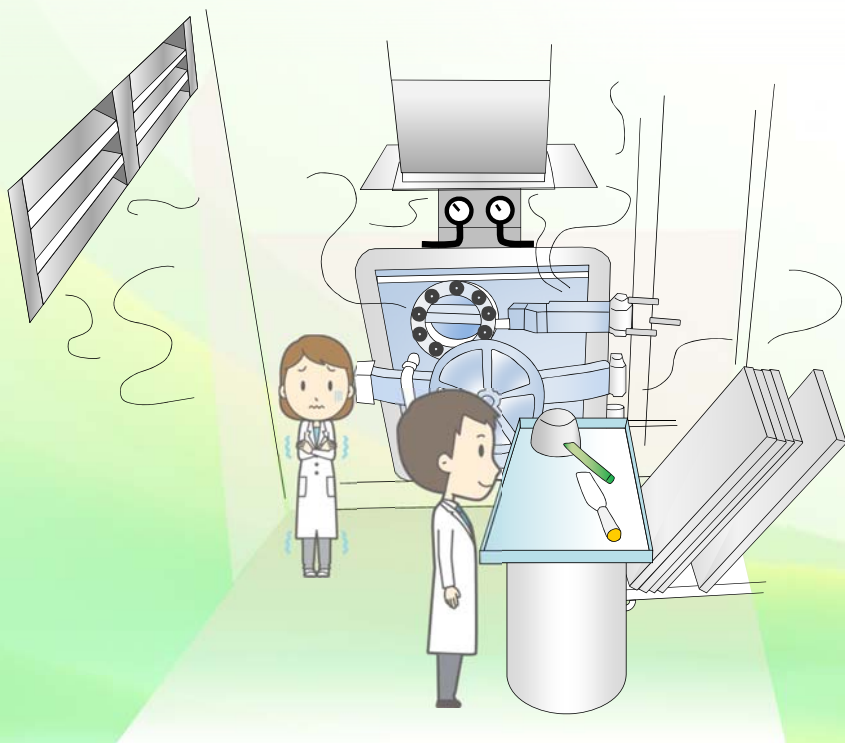

Wearing gas detectors on a routine basis enables early detection of used gas leaks and improves work safety.

During the production of pharmaceutical intermediates, an abnormal reaction rapidly increased internal pressure inside a reaction vessel, resulting in rupture of the vessel.

[Location of accident]


During degassing at a plant producing pharmaceutical intermediates and other substances

[Cause of accident]

Steam was used for degassing during production (to remove phosgene gas and other by-product gases in a 6 kl can used as the reaction vessel). Abnormal chemical reactions were induced by a temperature increase, etc. in the 6 kl can. The cover of the 6 kl can came loose from the clamp, and the can ruptured.

[Damage/injuries]

Five workers were exposed to reaction products scattered from the 6 kl can. One died.

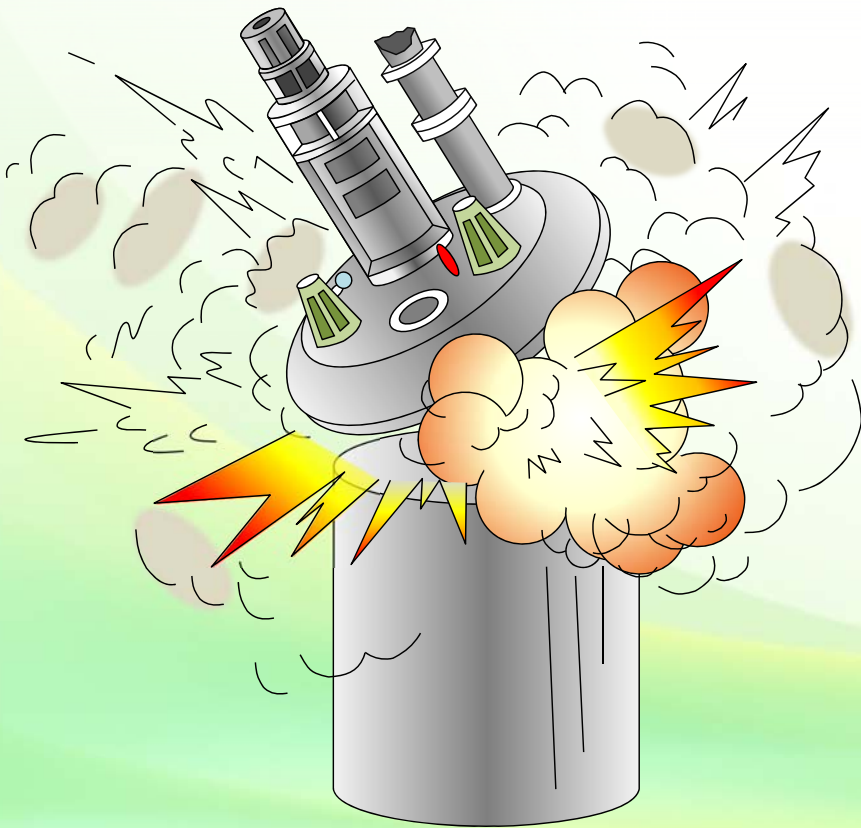

Wearing gas detectors on a routine basis enables early detection of used gas leaks and improves work safety.

During the production of pharmaceutical intermediates, sodium hydride ignited and toluene vapor caught fire, resulting in burn injuries.



[Location of accident]


During the production of pharmaceutical intermediates at a drug manufacturing plant from toluene, a Class 2 organic solvent

[Cause of accident]

While feeding sodium hydride (NaH), a water-prohibited dangerous substance, into a sodium reaction tank containing anhydrous toluene, a worker removed his jacket and began working in a t-shirt. NaH reacted with the sweat falling from his face and arms and ignited. Toluene vapor within the reaction tank caught fire near the feed port.

[Damage/injuries]

The victim sustained burn injuries from exposure to this fire. After the burns were cooled with water, the victim was transferred to the hospital and diagnosed with second degree burns.

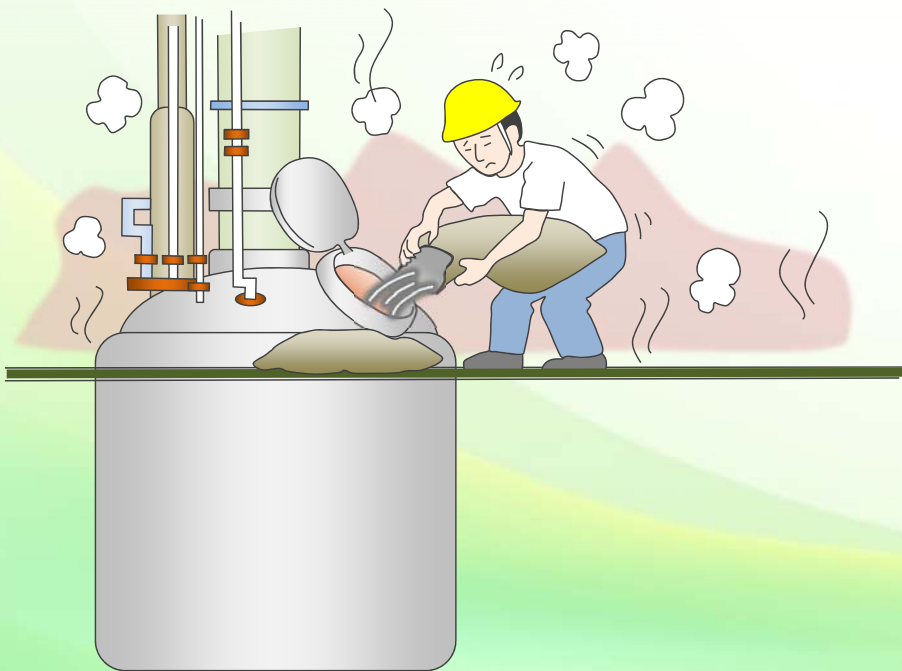

Wearing gas detectors on a routine basis enables early detection of toxic gas leaks and improves work safety.



Product Information

Portable Multi Gas
Detector

Model:
GX-6000



Features

- A single unit can simultaneously display up to six types of gases, including VOCs. This is the first product of its kind from a Japanese manufacturer.
- The PID sensor enables measurements of more than 200 types of chemical substances subject to regulation.
- Ideal for checking the risks and hazards of chemical substances as required under the Industrial Safety and Health Act
- Support for multilingual display (Japanese, English, French, Spanish, etc.)
- Equipped with convenient new functions, including panic alarm and LED flashlight



Features

- Equipped with photoionization detector (PID) optimum for VOC detection
Support for three measurement ranges (0-10/100/1,000 ppm)
Sensor structure resists effects of humidity and keeps foreign materials away from lamp.
Measurement cycles configurable up to 5 minutes and 50 seconds at intervals of 10 seconds (Default: 1 minute)
- Various functions with high working efficiency
Easily installed in control system (4-20 mA output)
Switchable type (RVOC-10s) models are available.

Fixed PID VOC Monitor

Model: RVOC



SD-1

SD-1RI

(For combustible gases)

SD-1GH

(For combustible/toxic gases)

SD-1EC

(For carbon monoxide/hydrogen sulfide)

SD-10X

(For oxygen)

Smart Transmitter/
Gas Detectors

Features

- Suitable for use as an explosion-proof product, even in a hydrogen/acetylene atmosphere
- Waterproof/dustproof enclosure (IP 65 equivalent) allows deployment in severe environments.
- Supports HART Communication Protocol, allowing transmission of more information over legacy analog 4-20 mA connection.
 - * Excluding SD-1 (TYPE NC)
- SD-1RI, SD-1EC, and SD-10X are SIL 2 certified in all parts of the functional safety standard, marking a first for Japanese manufacturers.
- Using the suction cap for the SD-1 series and connecting the detector to a suction pump or an aspirator unit enables suction type operation.

Model: SD-1 series



Indoor Oxygen Monitor

Model: OX-600

Features

- Large, easy-to-read three-color LCD screen display

First alarm (orange)



Second alarm (red)



- Equipped with pressure correction function to prevent fluctuating readings due to atmospheric pressure
- The product line offers three types of power supply specifications (AC power supply, DC power supply, and dry battery) to suit the power supply available at the installation location.
- Continuous operation for approximately one year on two AA alkaline batteries
 - * No alarm; backlight switched off
- Remote measurement at distances of up to 20 m with the remote sensor (sold separately)



GP-03

(For combustible gases)

OX-03

(For oxygen)

HS-03

(For hydrogen sulfide)

CO-03

(For carbon monoxide)

Personal Single Gas Monitors

Model: 03 series

Features

- Models for use with rechargeable batteries have been added to the product line.
- Standard protective covers protect the main unit from scratches, dirt, and shock.
- Compact, lightweight design doesn't interfere with work.
- Inherently safe and explosion-proof enclosure is ideal for use in hazardous locations.

International Agents

International Agents



North America

South America

Asia and Pacific

Russia and Central Asia

Europe

Middle East

Africa



RIKEN KEIKI

International agents (table of contents)

North America

[U.S.A.](#)

South America

[Brazil](#)

[Argentina](#)

[Peru](#)

[Chile](#)

[Uruguay](#)

Asia and Pacific

[China](#)

[South Korea](#)

[Taiwan](#)

[Singapore](#)

[Malaysia](#)

[Indonesia](#)

[Thailand](#)

[India](#)

[Vietnam](#)

[Philippines](#)

[Australia](#)

Europe

[Germany](#)

[Greece](#)

[THE NETHERLANDS](#)

[Norway](#)

[Turkey](#)

[U.K.](#)

Middle East

[U.A.E.](#)

[Israel](#)

Africa

[South Africa](#)

Russia and Central Asia

[Russia](#)



International agents (U.S.A.)

RKI INSTRUMENTS, INC.

ADDRESS : 33248 CENTRAL AVENUE, UNION CITY, CA94587-2010 U.S.A.

TEL : +1-510-441-5656

FAX : +1-510-441-5650

E-MAIL : bob@rkiinstruments.com, sandra@rkiinstruments.com

PERSON : MR. BOB PELLISSIER (PRESIDENT)
MRS. SANDRA GALLAGHER (VICE PRESIDENT)

WEBSITE : <http://www.rkiinstruments.com/>

International agents (BRAZIL)

HIDEO NAKAYAMA IMP. EXP. COM. E INDUSTRIA LTDA

ADDRESS : RUA SANTA AMÉLIA, 33 PRACA DA BANDEIRA
RIO DE JANEIRO RJ CEP: 20.260-030 BRAZIL

TEL : +55-21-2590-3496

FAX : +55-21-2270-6390

E-MAIL : hideko@nakayama.com.br

PERSON : MR. HIDEO NAKAYAMA (PRESIDENT)
MS. HIDEKO NAKAYAMA

WEBSITE : <http://www.nakayama.com.br/>



International agents (ARGENTINA)

Prevent Gas SA

ADDRESS : INCLAN 4185 (C1258ABK) CIUDAD DE BUENOS AIRES, ARGENTINA

TEL : +54-11-4925-6342

FAX : +54-11-4925-6342

E-MAIL : ventas@preventgas.com.ar

PERSON : Mr. German Rosas

WEBSITE : <http://preventgas.com.ar/>

HUBERG SUDAMÉRICA S.A.

ADDRESS : ERASMO (CALLE 79) 1047 (B1650HOE) VILLA PIAGGIO
SAN MARTÍN, BUENOS AIRES, ARGENTINA

TEL : +54-11-4713-6068

FAX : +54-11-4713-6072

E-MAIL : arguello.juan@huberg.com

PERSON : MR. JUAN IGNACIO ARGUELLO

WEBSITE : <http://www.huberg.com.ar>





International agents (PERU)

RESET ELECTRONICA Y SISTEMAS S.R.L.

ADDRESS : Calle Martin de Murua 150 Of. 1004 - 1005
Edificio Plexus San Miguel Business Center
San Miguel - Lima 32, PERU

TEL : +51-1-6367303

FAX :

E-MAIL : enquiries@resetnaval.com

PERSON : Mr. Max Muñoz Moran

WEBSITE : <http://www.resetnaval.com/>



International agents (CHILE)

Electronic Marine Ltd

ADDRESS : Uruguay 556 of 404 Valparaiso, CHILE
TEL : 56-32-2220050
FAX : 56-32-2593135
E-MAIL : marketing@electronicmarine.cl
PERSON : Alejandra Palominos (Marketing Manager)
WEBSITE : <http://www.electronicmarine.cl>

International agents (URUGUAY)

microsur

ADDRESS : Carlos María Morales 934, 11200 Montevideo, Uruguay

TEL : 598-2410-1128

FAX : 598-2410-1128

E-MAIL : microsur@microsur.org

PERSON : Dra.Nermys Hernandez

WEBSITE : <http://www.microsur.org>



International agents (CHINA)

RIKEN KEIKI COMMERCIAL(SHANGHAI) CO., LTD.

ADDRESS : HEAD OFFICE : ROOM4A SHANGHAI WATANABE INTERNATIONAL
COMMERCIAL BUILDING NO.55, LINPING N.ROAD, HONGKOU DISTRICT,
SHANGHAI, 200086 CHINA
SALES DEPARTMENT OFFICE : ROOM1106 DALIAN LEE WAN HOTEL NO.8,
MINZHU SQUARE, ZHONGSHAN DISTRICT, DALIAN, LIAONING, 116001
CHINA

TEL : 86-411-8212-3832

FAX : 86-411-8212-3833

E-MAIL : dl@rkkc.net (Ms. Sun Jun)
dl101@rkkc.net (Ms. Qu shuai)
dl102@rkkc.net (Ms. Xu fei)

WEBSITE : <http://www.rikenkeiki.asia>

International agents (KOREA)

RIKEN KEIKI KOREA CO., LTD.

ADDRESS : 23, HWAJEONSANDAN 2-RO 134,
GANGSEO-GU, BUSAN, 46741 KOREA
TEL : 82-51-712-9900 FAX: 82-51-518-7736
E-MAIL : master@rikenkeiki.co.kr PERSON: MR.SUN-GU,LEE
WEBSITE :
(KOREAN) <http://rikenkeiki.co.kr/bn/>
(ENGLISH) <http://rikenkeiki.co.kr/bn/english/>



HIGH INTEGRATED TECHNOLOGY, INC.

ADDRESS : 72, SEGYOSANDAN-RO, PYEONGTAEK-SI,
GYEONGGI-DO, 17843, KOREA
TEL : 82-31-650-7000 FAX: 82-31-650-7007
E-MAIL : info@hitinc.co.kr PERSON: MR.HYUNG-SIL, KIM
WEBSITE :
(KOREAN) <http://www.hitinc.co.kr/>
(ENGLISH) http://www.hitinc.co.kr/?strMode=company_e/company



International agents (TAIWAN)

RIKEN KEIKI TAIWAN CO., LTD. HEAD OFFICE

ADDRESS : NO.87, YANGMING RD., SHANHUA JEN, TAINAN, 741, TAIWAN

TEL : 886-6-581-1224

FAX : 886-6-581-1250

E-MAIL : episys@ms22.hinet.net

PERSON : MR. SEITARO TAKAHASHI (PRESIDENT)

WEBSITE : <http://www.rikenkeiki.com.tw/admin/news/front/news.php>

RIKEN KEIKI TAIWAN CO., LTD. TAICHUNG BRANCH

ADDRESS : NO.2, ALY.14, LN.150-30, SEC.3, XITUN RD., XITUN DIST., TAICHUNG CITY 407,
TAIWAN

TEL : 886-4-2462-5386

FAX : 886-4-2462-5508

E-MAIL : johnny@rikenkeiki.com.tw

PERSON : MR. WU WEN CHENG

International agents (SINGAPORE)

R K INSTRUMENTS (S) PTE LTD

ADDRESS : 102F PASIR PANJANG ROAD #03-11, CITILINK WAREHOUSE COMPLEX
SINGAPORE 118530

TEL : 65-6275-3398

FAX : 65-6275-3387

E-MAIL : rk@rkinstruments.com.sg

PERSON : MR. BERNARD QUEK (PRESIDENT)

WEBSITE : <http://www.rkinstruments.com.sg/>



International agents (MALAYSIA)

KINETICS SYSTEMS MALAYSIA SDN. BHD.

ADDRESS : 12A, JALAN RINGGIT 23/11 , SECTION 23, 40300 SHAH ALAM, SELANGOR
DARUL EHSAN MALAYSIA

TEL : 603-5542-2288

FAX : 603-5542-2289

E-MAIL : ck.chooi@kinetics.net

PERSON : MR. CHOOI CHOON KEET
(GENERAL MANAGER)

WEBSITE : <http://www.kinetics.net/>



International agents (INDONESIA)

PT. PRATAMA GRAHA SEMESTA

ADDRESS : KOMPLEKS LODAN CENTER BLOK H-11 JL. LODAN RAYA NO.2 ANCOL - PADEMANGAN
JAKARTA UTARA 14430 INDONESIA

TEL : 62-21-6900656

FAX : 62-21-6900657

E-MAIL : sales@ptpgs.co.id

PERSON : MR. FRENGKY TOMBOKAN



PT. CENTRADINDO UNITRAS (FOR PERTAMINA & MARINE SECTOR)

ADDRESS : COMPLEX PERKANTORAN DUTA HARAPAN INDAH JL. KAPUK MUARA RAYA BLOK SS
NO.3 JAKARTA UTARA 14460 INDONESIA

TEL : 62-21-6624347

FAX : 62-21-6623594

E-MAIL : centradindo.unitras@gmail.com

PERSON : MR. DJOHAN DAHLIAN (MANAGING DIRECTOR)



International agents (THAILAND)

TAIYO GASES CO., LTD.

ADDRESS : 17TH FLOOR SERM-MIT TOWER, 159 SUKHUMVIT 21 ROAD, NORTH
KLONGTOEY, WATTANA, BANGKOK 10110 THAILAND

TEL : 66-2-260-2691

FAX : 66-2-260-2690

E-MAIL : hato@taiyogases.th.com

PERSON : MR. KAZUNARI HATO

WEBSITE : <http://www.taiyogases.th.com/>

International agents (INDIA)

TRITECH

ADDRESS : 121,VEENA INDUSTRIAL ESTATE, OPP.FITWELL HOUSE, L.B.S.MARG,
VIKHROLI(W) MUMBAI-400 083 INDIA

TEL : 91-22-2577-7288, 6796-9990

FAX : 91-22-6796-9991

E-MAIL : tritec@vsnl.com

PERSON : MR. NARESH SHARMA MR. JIGNESH SHAH

WEBSITE : <http://www.tritech.in/>



International agents (VIETNAM)

VIETNAM GAS DETECTOR ONE MEMBER CO., LTD.

ADDRESS : 79 Ly Chinh Thang St, ward 8, Dist 3, HCMC, Vietnam

TEL : +84-(0)28-35262986 / 35262987

FAX : +84-(0)28-35262980

E-MAIL : info@vina-gasdetector.vn

PERSON : MR. CAO MINH LOI (Director)

WEBSITE : <http://vina-gasdetector.vn/>



International agents (PHILIPPINES)

PILIPINAS TRADE GAS, INC. (PTGI)

ADDRESS : 23RD FLOOR ONE CORPORATE CENTER DONA JULIA VARGAS AVE.,
CORNER MERALCO AVENUE, ORTIGAS CENTER PASING CITY,
PHILIPPINES

TEL : 632-635-7320

FAX : 632-635-7322

E-MAIL : gerry.gueco@yahoo.com.ph

PERSON : MR. S. HARA (PRESIDENT)
MR. GERRY C. GUECO (IN CHARGE)



International agents (AUSTRALIA)

CONTROL EQUIPMENT PTY. LTD.

ADDRESS : UNIT 1/3 DEAKIN STREET, BRENDALE QLD 4500, AUSTRALIA

TEL : 61-7-3481-9000

FAX : 61-7-3481-9088

E-MAIL : sales@controlequipment.com.au

PERSON : MR. GREG LOVE (GENERAL MANAGER)

WEBSITE : <http://www.controlequipment.com.au/>



International agents (GERMANY)

RIKEN KEIKI GmbH

ADDRESS : Theodor-Heuss-Allee 112, 60486 Frankfurt am Main, Germany

TEL : +49-6966-7741-460, 461

E-MAIL : s-ono@rikenkeikigmbh.de

PERSON : MR. SHINTARO ONO(Managing Director)

WEBSITE : <http://www.rikenkeiki.com/de/>



International agents (GREECE)

ZERVOUDAKIS MARINE SUPPLIES LTD.

ADDRESS : 31, MILOU STREET, PIRAEUS 18545, GREECE

TEL : +30-210-4623700

FAX : +30-210-4627900

E-MAIL : zerv@otenet.gr

PERSON : MR. JOHN ZERVOUDAKIS

WEBSITE : <http://www.zervoudakis.gr/>



International agents (THE NETHERLANDS)

GMS Instruments B.V.

ADDRESS : Driemanssteeweg 190, 3084 CB, Rotterdam, The Netherlands

TEL : +31102938860

E-MAIL : sales@gms-instruments.nl

PERSON : MR. SEBASTIAN KELDERMAN AND MR. MARKUS FRANK

WEBSITE : <http://gms-instruments.nl/>

International agents (NORWAY)

MARTIN BRUUSGAARD & CO. AS.

ADDRESS : LOKKETANGEN 20A, 1337 SANDVIKA NORWAY
P.O. BOX 3, 1301 SANDVIKA NORWAY

TEL : +47-6754-9330

FAX : +47-6754-9331

E-MAIL : dag@bruusgaard.no

PERSON : MR. DAG MAARTMANN

WEBSITE : <http://www.bruusgaard.no/>



International agents (TURKEY)

DOGANAK COLL. CO.

ADDRESS : KARAKOY, OKCUMUSA CADDESİ, IPEK CIKMAZI,
BOGAZICI HAN NO:6 KAT:2
34420 ISTANBUL, TURKEY

TEL : +90-212-244-5318 / 245-2512

FAX : +90-212-243-5704

E-MAIL : doganak@doganak.com

PERSON : MR. MEHMET ALI AKYUZ

WEBSITE : <http://www.doganak.com/>



International agents (U.K.)

WEATHERALL EQUIPMENT & INSTRUMENTS LTD.

ADDRESS : UNIT 1 STATION APPROACH, WENDOVER AYLESBURY,
BUCKS HP22 6BN ENGLAND

TEL : +44 1296 622180

FAX : +44 1296 624955

E-MAIL : sales@weatherall-uk.com

PERSON : MR. R.H.C. WORTHINGTON

WEBSITE : <http://weatherall-uk.com/>



International agents (U.A.E.)

METRO MAC

ADDRESS : WS 104, DUBAI MARITIME CITY (DMC), DUBAI, U.A.E.
P.O.BOX: 13485 DUBAI U.A.E.

TEL : +971-4-5636100

FAX : +971-4-5519973

E-MAIL : sales@metromac.com

PERSON : MR. K.K. KUTTY
(MANAGING DIRECTOR)

WEBSITE : <http://www.metromac.com/>



International agents (ISRAEL)

MODCON SYSTEMS LTD.

ADDRESS : MODCON HOUSE M. BORNSHTEIN ST.,
SOUTH AKKO INDUSTRIAL PARK, 24222 ISRAEL

TEL : +972-4-9553955

FAX : +972-4-9553956

E-MAIL : gregorys@modcon.co.il

PERSON : MR. GREGORY SHAHNOVSKY

WEBSITE : <http://www.modcon-systems.com/>



International agents (SOUTH AFRICA)

I.S.L. ENTERPRISES (PTY) LTD.

ADDRESS : 29 KLOSSER STREET PAROW 7500 SOUTH AFRICA
P.O.BOX 72 PAROW 7499 SOUTH AFRICA

TEL : +27-21-930-2354

FAX : +27-21-930-2043

E-MAIL : istvanisl@xsinet.co.za

PERSON : MR. I.S. LADANYI



International agents (RUSSIA)

TAIRIKU TRADING CO., LTD.

ADDRESS : Head office in Tokyo, Japan KAJITANI DAIICHI BUILDING, 21-10,
SHINKAWA 2-CHOME, CHUO-KU, TOKYO 104-0033, JAPAN

TEL : +81-3-6222-0194 FAX: +81-3-6222-0201

E-MAIL : tairiku@tairiku-trading.co.jp

PERSON : MR. MORITA

WEBSITE : <http://www.tairiku-trading.co.jp/?lang=en>

OOO"TAIRIKU MOSCOW LTD."

ADDRESS : RUSSIAN FEDERATION, 119049,
MOSCOW, KOROVY VAL STREET,7,
BUILDING 1, FLOOR 2,OFFICE 12

TEL : +7-495-237-18-82 +7-495-237-19-26

FAX : +7-495-931-99-47

E-MAIL : tairiku.alpeev@co.ru, ofistrk@online.ru

PERSON : MR. ALPEEV M.A., (MANAGER)





*We are a **pioneer** in creating **safe working** environments for workers.*